
Conventional 7000 Series



Contact us 800-433-5620 today: hiniker@hiniker.com



- · Optional LED or Halogen headlights.
- 1/4" thick HMW low friction polyethylene moldboard never needs refinishing.
- Externally mounted pump simplifies installation, comes off the truck with the plow.
- The high-tensile steel superstructure of the moldboard provides exceptional resistance to bending and twisting, for extra heavy-duty applications.
- 30" tall high curve, high-density polyethylene moldboard is dent-resistant and corrosion-free.

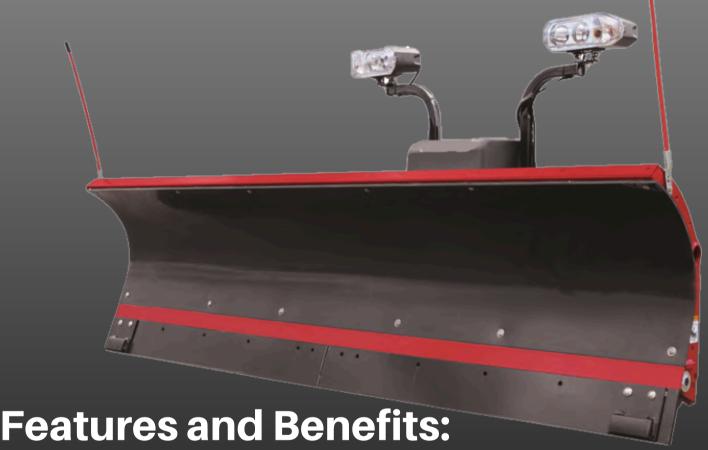

The ULTIMATE Performance With Hiniker Trip-Edge Straight Plows

The horizontal-truss moldboard design provides incredible strength, durability and resistance to bowing. The corrosion-proof HPDE moldboard is dent-resistant with less surface friction for easier plowing and greater efficiency. Protection is provided by Hiniker's exclusive split trip-edge design.





Optional Accessories:

• Skid Shoes • Curb Guards • Wear Bars • Snow Deflectors • Box Ends

Specifications

MODEL	7814	7914
Blade Width	8' (82" at 31° angle)	9' (93" at 31° angle)
Blade Height	30"	30"
Vertical Ribs	6	6
Torsion-Trip Springs	6	6
Cutting Edge Weight	1/2" x 6" 1084 Steel	1/2" x 6" 1084 Steel
(plow only)	720 lbs	777 lbs